



Appliance coupler Ready-made with cable

GST 18/3 poles

voltage 250 V ~ VDE 0110 G 0 rated current 16 A rated cross-section 1.5 mm²

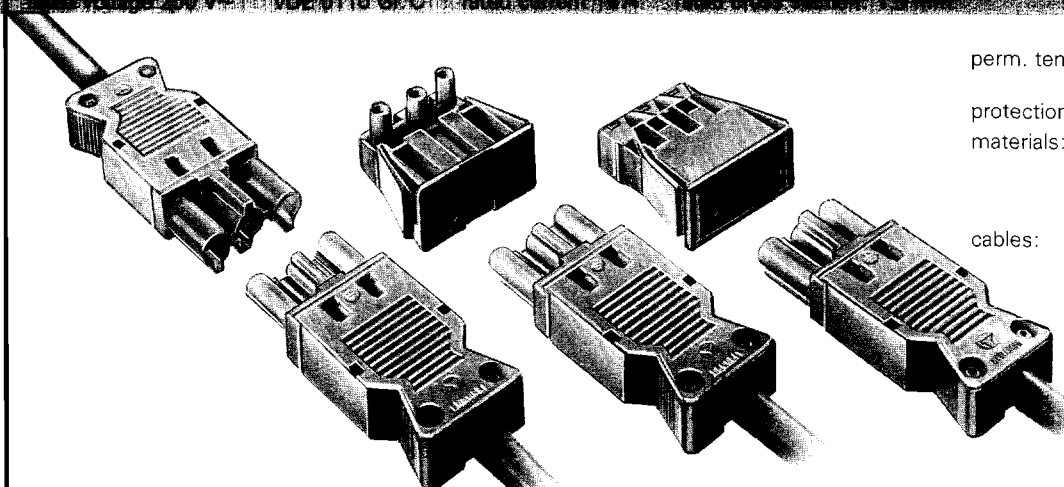


perm. temperature: 70°C cable,
110°C female/male parts
protection category: IP 20 as per DIN 40050
materials: insulating parts
thermoplastics contact
parts brass plated with
surface treatment
cables: H05 V V-F3 G 1.5/2.5



**female/male
part**


length	1.5 mm ² / black	1.5 mm ² / white	
0.5 m	92.232.0500.1	92.232.0500.2	50
1.0 m	92.232.1000.1	92.232.1000.2	50
1.5 m	92.232.1500.1	92.232.1500.2	50
2.0 m	92.232.2000.1	92.232.2000.2	50
2.5 m	92.232.2500.1	92.232.2500.2	50
3.0 m	92.232.3000.1	92.232.3000.2	50
3.5 m	92.232.3500.1	92.232.3500.2	50
4.0 m	92.232.4000.1	92.232.4000.2	50

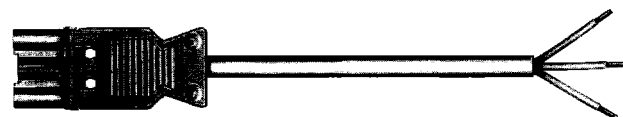

with cable ferrules

female part/—


length	1.5 mm ² / black	1.5 mm ² / white	
0.5 m	92.232.0503.1	92.232.0503.2	50
1.0 m	92.232.1003.1	92.232.1003.2	50
1.5 m	92.232.1503.1	92.232.1503.2	50
2.0 m	92.232.2003.1	92.232.2003.2	50
2.5 m	92.232.2503.1	92.232.2503.2	50
3.0 m	92.232.3003.1	92.232.3003.2	50
3.5 m	92.232.3503.1	92.232.3503.2	50
4.0 m	92.232.4003.1	92.232.4003.2	50

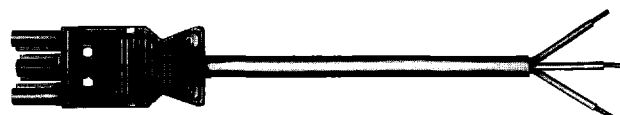

with cable ferrules

male part/—

length	1.5 mm ² / black	1.5 mm ² / white	
0.5 m	92.232.0504.1	92.232.0504.2	50
1.0 m	92.232.1004.1	92.232.1004.2	50
1.5 m	92.232.1504.1	92.232.1504.2	50
2.0 m	92.232.2004.1	92.232.2004.2	50
2.5 m	92.232.2504.1	92.232.2504.2	50
3.0 m	92.232.3004.1	92.232.3004.2	50
3.5 m	92.232.3504.1	92.232.3504.2	50
4.0 m	92.232.4004.1	92.232.4004.2	50

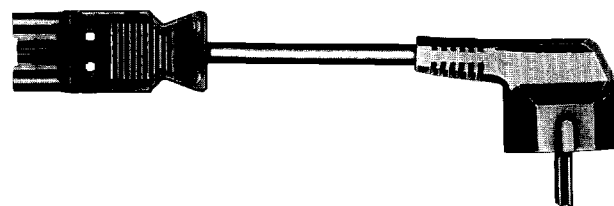

**female part/—
angled plug**


DIN 49441

length	1.5 mm ² / black	1.5 mm ² / white	
1.5 m	92.232.1507.1	92.232.1507.2	50
2.0 m	92.232.2007.1	92.232.2007.2	50
2.5 m	92.232.2507.1	92.232.2507.2	50

only with screwed, 2-pole angled plug with 2 earthing systems as per
DIN 49441 Form R2/CEE 7 Standard sheet VII

**Appliance coupler
250 V~, 16 A**

GST18/3

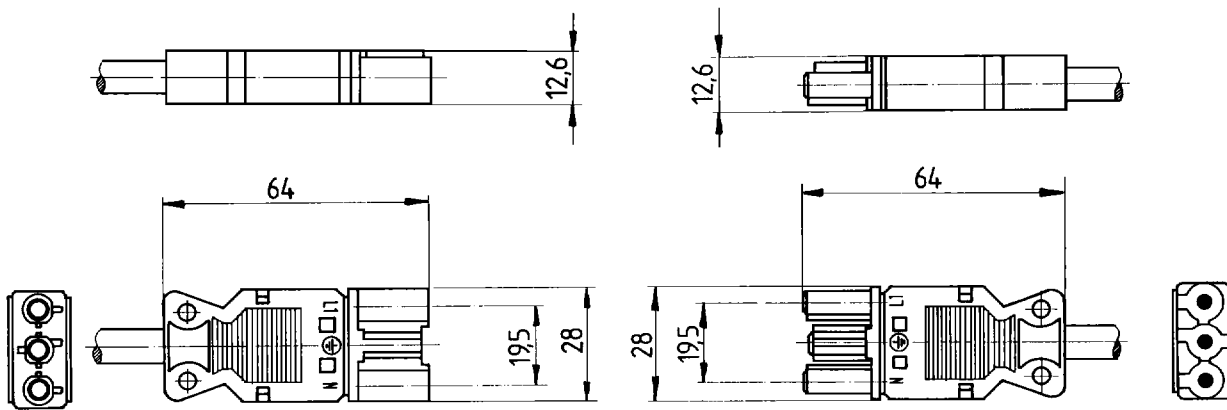

We deliver the ready-made plug connector GST 18 with cable lengths from 0.5 m to 4 m (in steps of 50 cm) pre-mounted.

The tolerance in cable lengths is $\pm 3\%$. Intermediate and overlengths are available upon request.

Minimum order number per cable length: 50 pcs.

The cables have a cross section of 1.5 mm^2 .

Male/female parts with similar coding are available in black and white.

